



TURF/COMMERCIAL MODEL 100EFAC

LASTEC®

Manufacturer of the
World's Only High-Definition
Articulating Mowers




The Model 100EFAC delivers amazing productivity at a price point that is a fraction of other options available on the market.

Since Lastec's introduction of articulating rotary mowers in 1990, the turf industry hasn't had to accept the turf damage caused by wide area decks. Lastec Articulators all cut with the quality of a small push mower no matter how wide you need to cut. The Model 100EFAC is no exception, delivering a 100" (2.5 M) wide cut with the accuracy of five 21" (535mm) push mowers.

In addition to Antonio Carraro, this versatile model mounts to a variety of other tractors and delivers a cut so accurate that a whole new term describes it...

High Definition Mowing.

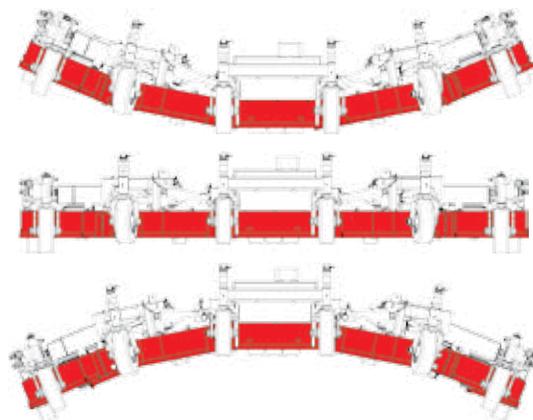

317.892.4444

1.800.515.6798

Fax: 317.892.4188

www.lastec.com

Quality Rotary Mowers for a World that isn't Flat



LASTEC®

Manufacturer of the
World's Only High-Definition
Articulating Mowers

The spindles are removable with 3 bearings and new trash guards for longer life.

21" (535mm) decks are the smallest in the industry for greater accuracy.

Lastec patented belt drives are 5 times more efficient and lower cost to maintain than competitor's hydraulic drives.

All decks are constructed from 3/16" (5mm) plate with 1/2" (13mm) steel reinforced leading edges.

9" (229mm) Gauge wheels are closer to the decks than any competitive mowers making them far more accurate.

Each deck is gauged by equally spaced points that allow them to float to any contour.

A V-deck design configuration features discharge baffling that evenly distributes grass in the heaviest cutting conditions.

Wheel hubs utilize tapered automotive roller bearings for long life.

All tires are semi-solid to eliminate flats.



Gauge wheels are located outside to allow closer precision when trimming.

Outer two decks fold hydraulically to 78" (2 M) for ease of transport.

100EFAC SPECIFICATIONS*

- Tractor Requirements: Minimum 35HP PTO
Standard Category-1
3 Point Hitch
- Cutting Width: 100" (2.5 M)
- Transport Width: 78" (2 M)
- Deck Configuration: Five 21" (535mm) Fully Articulating
- Deck Height Range: 1" to 4^{1/2}" (25 mm x 121 mm)
- Overall Weight: 1065 lbs. (483 kg)



Raises for transport up to 18" (457mm) from ground

*All specifications subject to change without notice

U.S. Patent Nos. 6,065,274
6,205,754

317.892.4444
1.800.515.6798
Fax: 317.892.4188
www.lastec.com

Quality Rotary Mowers for a World that isn't Flat